




DPS320

Installation Instructions

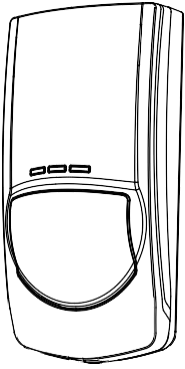


Digital Quad PIR Detector
www.pima-alarms.com


1 Location

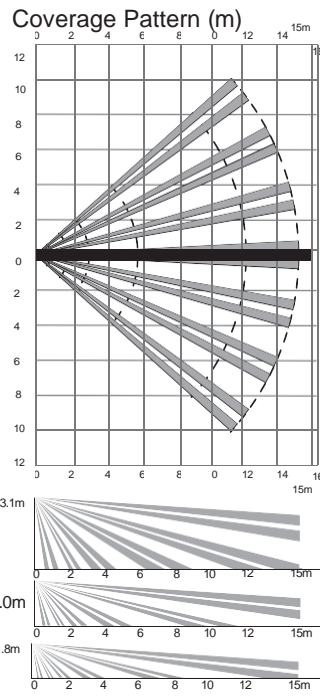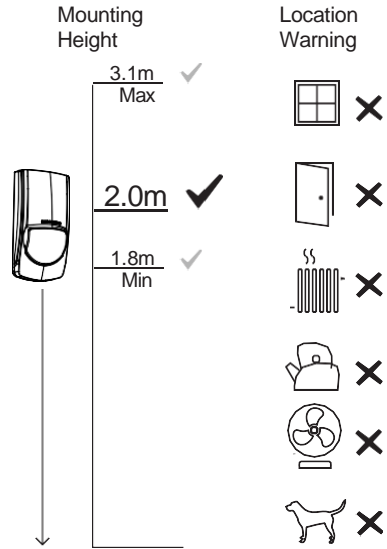

2 Mounting without bracket

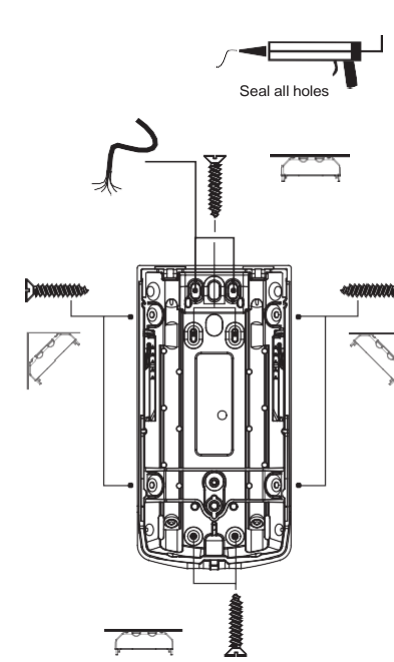

or Mounting with bracket

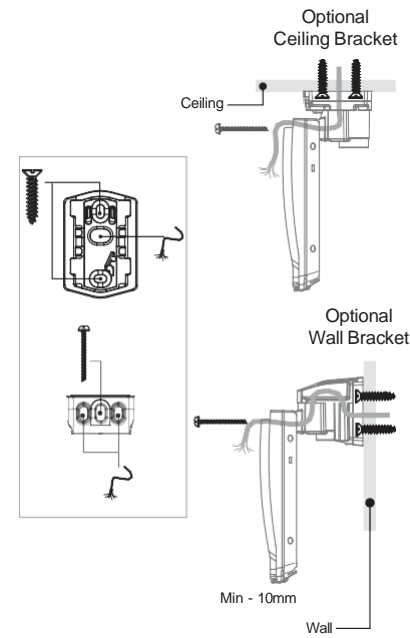


Key Features


- Genuine Quad Element Pyro
- 15 Meter Range
- Grade 2
- Multi Height Optics
- 1.8m - 3.1m Mounting Height
- Interchangeable Cartridges
- Selectable EOL Resistors
- Slide to Fit Front Cover
- Remote LED Control
- Sealed Optics
- True Creep Zones
- Digital Pulse Count†
- Temperature Compensation
- Digital Signal Processing†
- RFI Immunity up to 2.7GHz
- Optional Tamper Proof Bracket†

† Patent Pending


3 Detector Setup

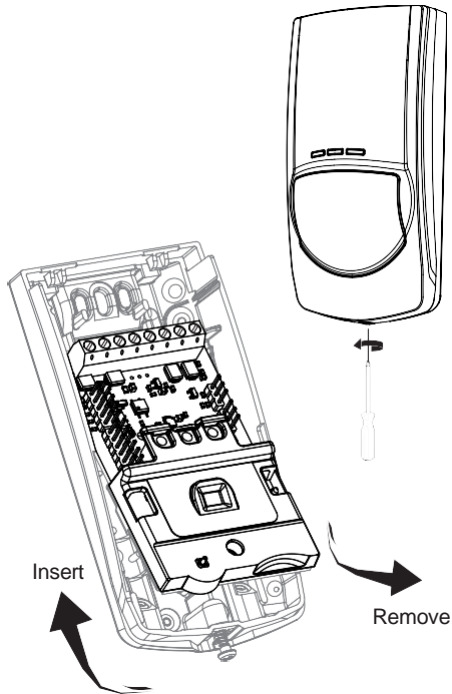


For Double Pole Wiring





For EOL Wiring



Tamper Resistor



Alarm Resistor

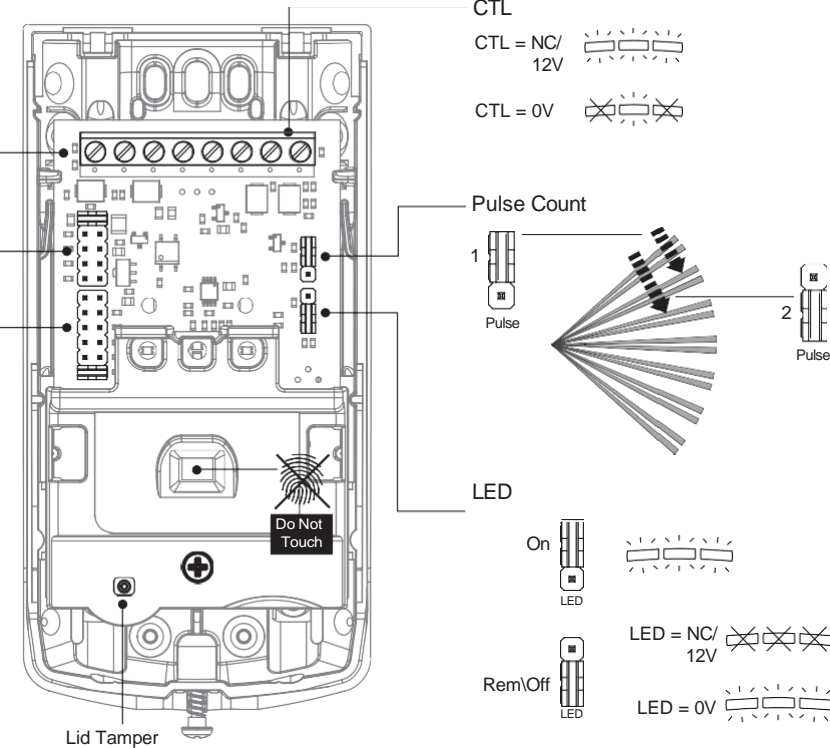

Specification

Description	Passive Infrared Detector
Pyro Electric Sensor	Genuine Quad Element
Range	15m
Optics	Multi Height Spherical
Detection Areas	136
Mounting Height	1.8m - 3.1m
Supply Voltage	9 - 15VDC (12V nominal)
Quiescent Current	15mA
Alarm (LED enabled)	15mA
Alarm (LED disabled)	10mA
LED Control = 0V	LED Enabled
LED Control = 12V / NC	LED Disabled
Pulse Count	Digital
Start-up Time	60 seconds
Alarm Time	> 2 seconds
Target Speed	0.3m/s - 3.0m/s
Dimensions (WHD) mm	60 x 118 x 40
Housing Material	2.5mm ASA
Operating Temperature	-20°C to +55°C
Storage Temperature	-35°C to 60°C
Maximum Humidity	95% non-condensing
Product Weight	110g
Packed Weight	125g
Maintenance	Annual Installer Check

Standards and Approvals

Security

PD 6662:2017

EN 50131-2-2:2017 Grade 2, Class II

EMC / False Alarm Immunity

EMC Immunity: EN 50130-4:2011

Radiated Immunity: 80MHz to 2.7GHz

Electrostatic Discharge: +/- 8kV

Conducted Immunity: 0.15MHz to 100MHz

Fast Transient Immunity: 2kV

Conducted & Radiated Emissions: EN 55032:2015

Hereby, PIMA declares that the DPS320 conforms to:

European Union (EU) Electro-Magnetic Compatibility (EMC)

Directive 2014/30/EU and EN 50130-4:2011+A1:2014

EMC Environment: Residential / Commercial / Light

Industrial / Industrial



CE: You can view the product EC Declaration of Conformity

Warranty

The PIMA DPS320 is guaranteed against defects in material or faulty workmanship for a period of 10 years from the date of purchase.

Disclaimer: PIMA will not accept any liability based on a claim that the PIMA DPS320 failed to perform correctly as it is a component part of an installation and not a complete intruder alarm system.

Regulatory



WEEE Directive: 2012/19/EU Compliant: This symbol indicates that according to local laws and regulations, this product should not be disposed of as municipal/household waste. Instead, it should be disposed of at the appropriate collection points designated for the recycling of electrical and electronic equipment or returned to PIMA upon purchase of new replacement products. This will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment.

RoHS RoHS Directive: 2011/65/EU Compliant:

PIMA declares that this product complies with and conforms to RoHS legislation that it does not contain more than the agreed levels of: Lead (Pb), Cadmium (Cd), Mercury (Hg), Hexavalent chromium (Cr6+), Polybrominated biphenyls (PBB), Polybrominated diphenyl ethers (PBDE)



Designed and Manufactured
in the United Kingdom

PIMA Electronic Systems Ltd.
5, Hatzoref St., Holon 5885633, Israel
Tel: +972.3.6506411
support@pima-alarms.com

PIMA P/N for order – 5010160

Document P/N – 4410574 Rev A (Sep 2023)

